


SCTB1000-01 (GJ)

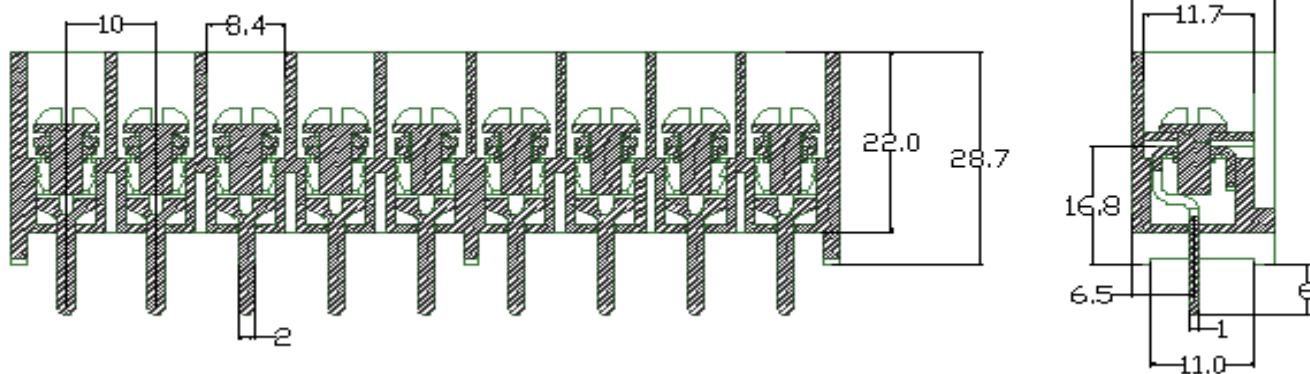

$L=P \times \text{POLES}$ (2~16P)

| | |
|------------------------------|------------------------|
| 技术参数 (TechnicalData) | |
| 间距 (Center Space) | 10mm |
| 压线范围 (Wire Range) | 26-12AWG |
| 螺钉扭矩 (Screw Torque)) | 13 lbfin |
| 额定参数 (Rated Paraneters) | 300V.20A |
| 冲击电压 (Rated Surge Voltage) | 4000V |
| 绝缘本体 (Insulation Body) | RBT.UL94.V-0 |
| 压线螺钉 (screw) | M4.Steel.Nickel Plated |
| 焊接端子 (terminal Body) | Brass.Tin Plated |
| 使用温度 (Operating Temperature) | -40°C ~120°C |
| PCB 孔径 (PCB Holes Diameter) | Φ 2.0mm |